

MARION COUNTY SURVEYOR'S OFFICE



SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 4 TWN. 14_N RNG. 3_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 8-7-09
Party Chief: Greene
Crew: Finney
Type of Marker: Harrison
Method of Establishment: County: 5-22-1995
IN S.P.C. E Zone, NAD 83
Name: 14030405
N: 492 750.078 6(m)
E: 53 723.641 6(m)

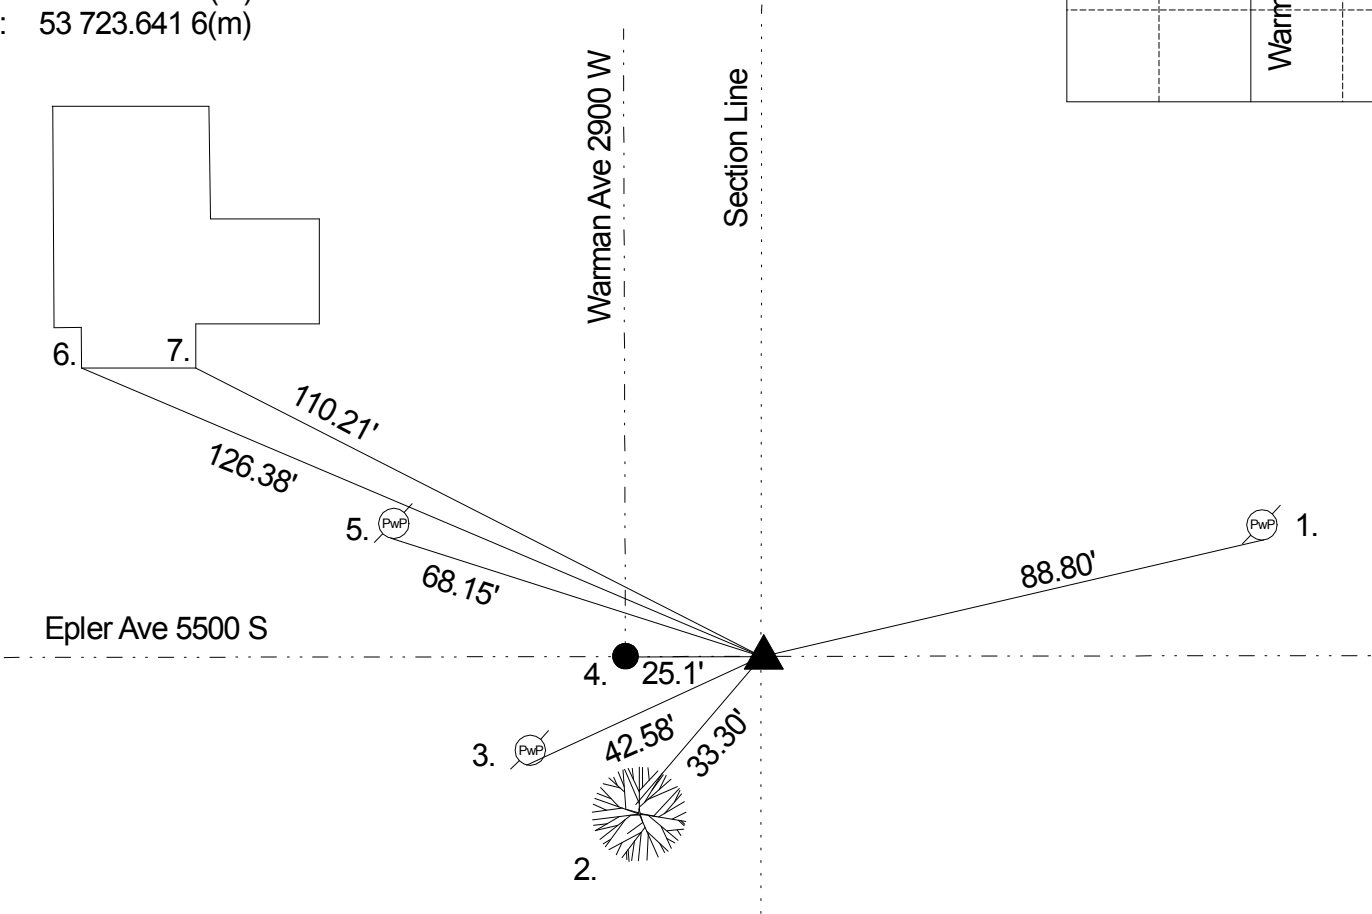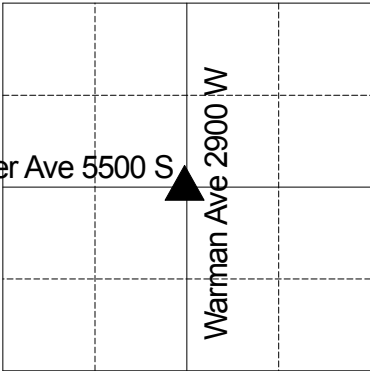

A survey by R. Mayhew on March 19, 1858 indicates no stone or witnesses (Perry Legal Book p 35). Corner referenced by MCS in 1950 and reported that all ties were gone. Corner referenced by Clevenger of Schershel Engineering on 2/1/1975 and called a found RR spike. Corner referenced by Fortner on 6/5/75 and called a RR spike. Corner referenced by Gries on 9/29/86 and called a RR spike. Corner referenced by Kiste on 7/23/90 and called a RR spike. Corner referenced by Wilcoxen on 5/22/95 and called a RR spike. Corner excavated by Wilcoxen on 6/2/1999 and a RR spike was found 4" down. No other points were found. A # 205 cast iron Harrison monument was set in position as the corner. Corner referenced by Kiste on 2/25/2004 and called a Harrison monument. Corner referenced by Greene on 8/7/09 and called a Harrison monument.

REF.	DISTANCE	DESCRIPTION
1.	88.80'	PK nail S PwP no # 12" up
2.	33.30'	Boat spike over RR spike NW twin cottonwood 12" up
3.	42.58'	Road nail S PwP #62-720 8" up
4.	25.1'	Due W to C/L of Warman Ave (PK nail found)
5.	68.15'	PK nail SW PwP no # 6" up
6.	126.38'	Top of slab SW porch 2810 Epler Ave
7.	110.21'	Top of slab SE porch 2810 Epler Ave

THIS CORNER POSITION
REPRESENTS A "TITLE" CORNER
AND MAY NOT NECESSARILY
REPRESENT THE POSITION BASED
ON RECORD CORNERS.